
## spring 0650

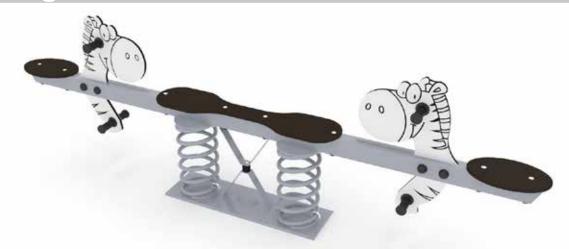

Device Specifications			
Safety zone	9,20 m <sup>2</sup>		
Length	2,60 m		
Width	0,22 m		
Total height	0,82 m		
Free fall height	0,50 m		
Age range	1-12 yrs		
In accordance w/ EN standards	1176-1:2009		
Availability of spare parts	Yes		
Weight of the heaviest part [kg]	45		
Dimension of the biggest part [cm]	260x82x22		

## Minimal space 4,60 2,60

## **MATERIAL SPECIFICATION**

Spring series – created with incredible precision that makes our spring rockers not only safe, but also visually appealing. Vivid colors and inviting shapes will attract every little explorer. The durability of this product is ensured by the atmospheric condition resistant materials it is made out of.

- Steel 20 mm spring phosphoresced with iron and powder coated
- Seat and standing platform made of atmospheric condition resistant plywood
- No sharp edges or chinks that would pose a danger for jamming of the head, fingers or any other body
- All screws covered with colorful plastic caps
- Colorful ergonomic handles and stools made out of durable materials
- Galvanized and/or powder coated steel construction

## **ADDITIONAL COMMENTS**

- Embedded 40 cm deep in flat ground
- The device is designed for public playgrounds

Due to the free fall height of the device, the EN 1176-1:2009 standard allows the following surfaces to cushion a fall. The level of granular materials requires filling in, conservation of synthetic materials is required in accordance with the manufacturer's instructions. Dimensions of the foundation are described in installation instruction.

Material	Description [mm]	Minimal layer thickness [mm]	Dimensions foundation
Turf/Soil			1, 2
Tree bark	Grain size from 20 to 80	300	1, 2
Chip	Grain size from 5 to 30	300	1, 2
Sand	Grain size from 0,2 to 2	300	1, 2
Gravel	Grain size from 2 to 8	300	1, 2
Synthetic materials	Free fall approval ≥500		1, 2



BabyCam playground and outdoor fitness manufacturer